

GESTRA Steam Trap With Ball Float

UNA 45, UNA 46 and UNA 46A range, up to PN 40 / Class 300



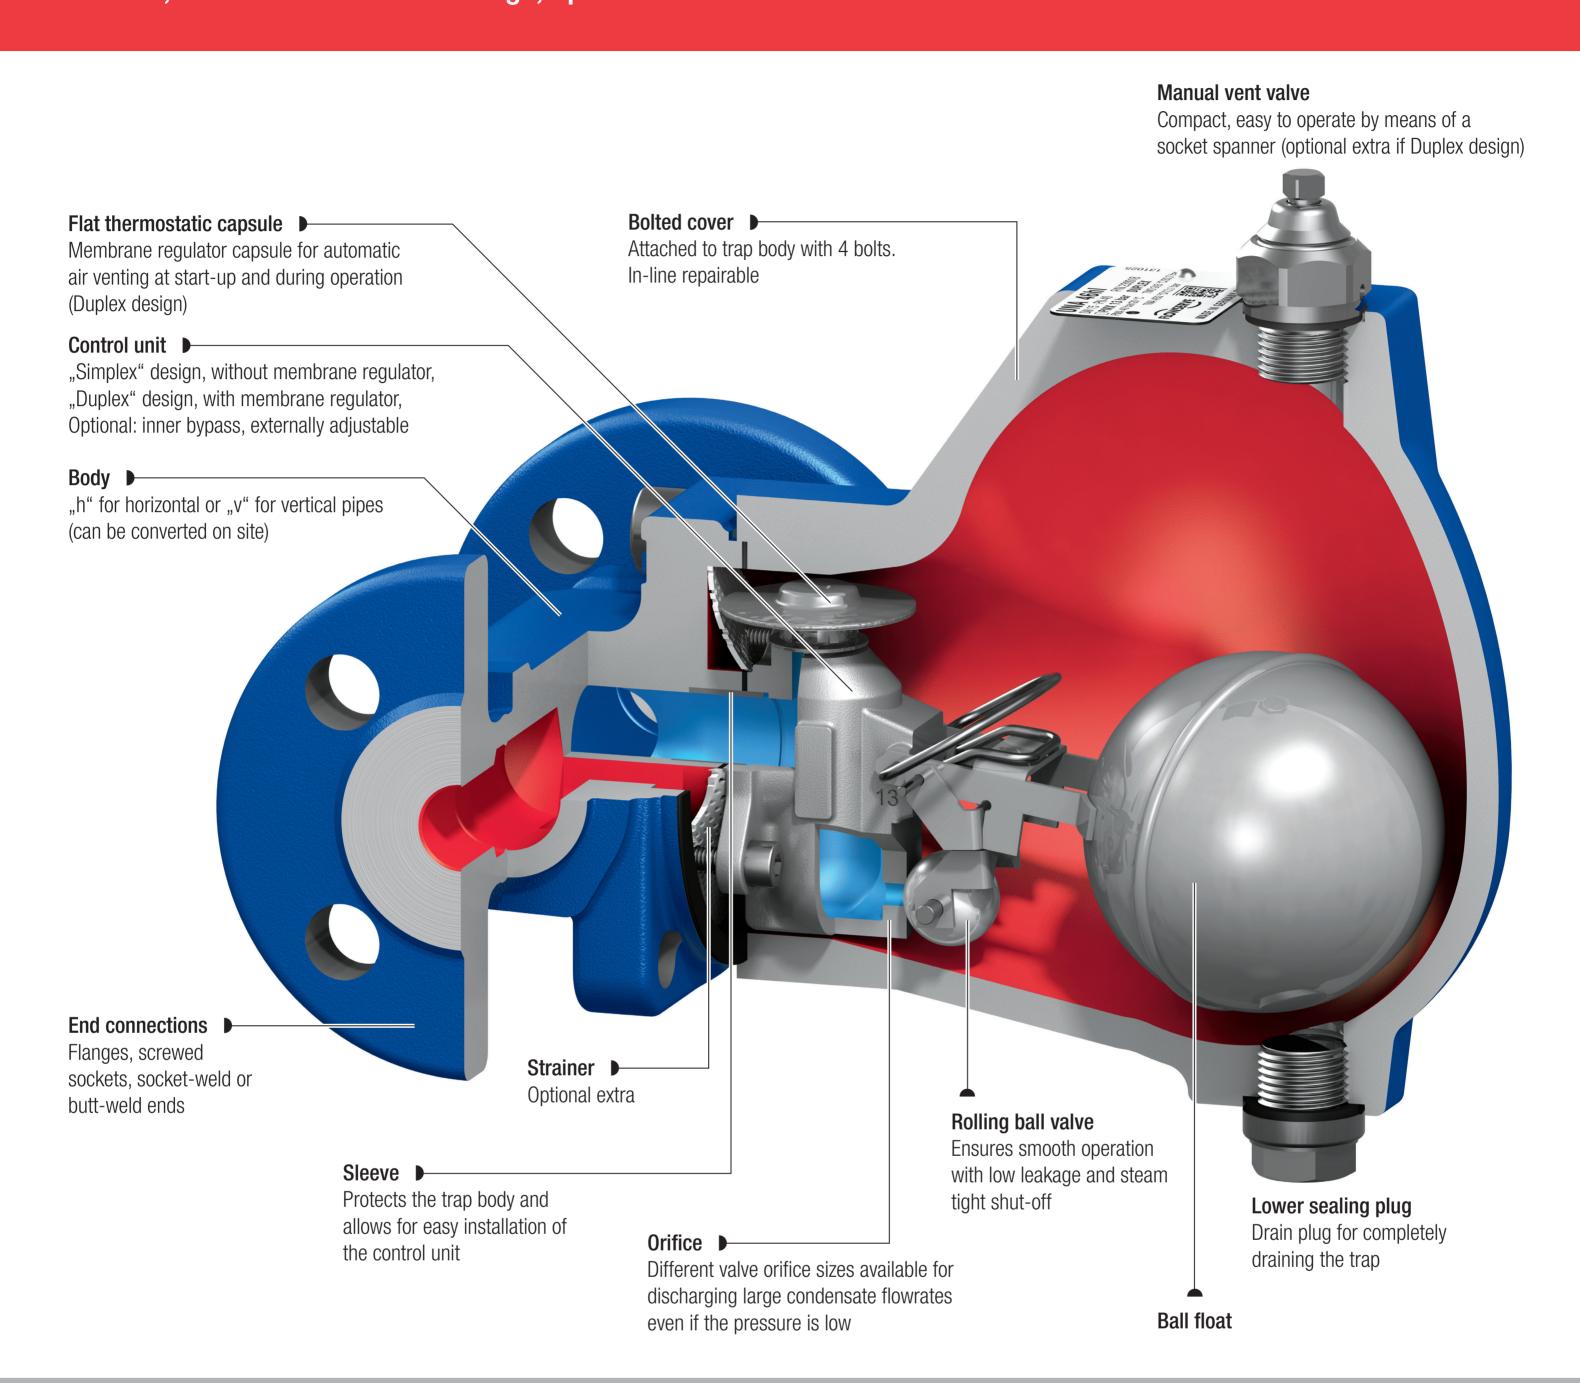

Special versions

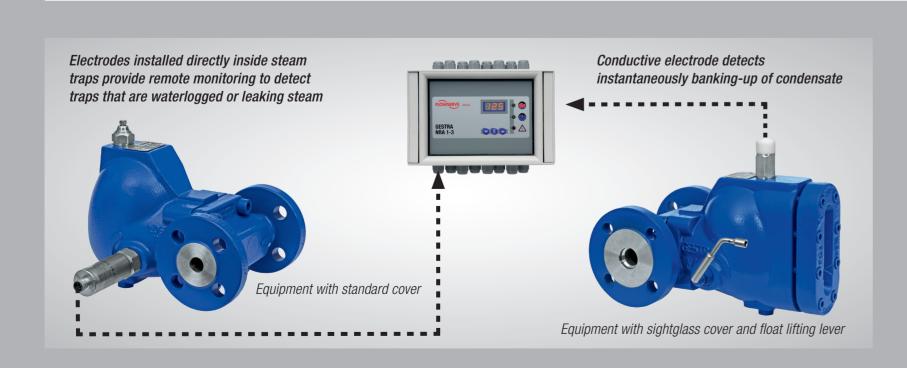

By repositioning the trap body it is possible to convert the flow direction (horizontal or vertical) or change it from left-to-right to right-to-left (or vice versa) to suit the pipework layout

The externally adjustable bypass is an optional extra for special condensate discharge requirements

